




# BASALT RECESSED COVER

## C250

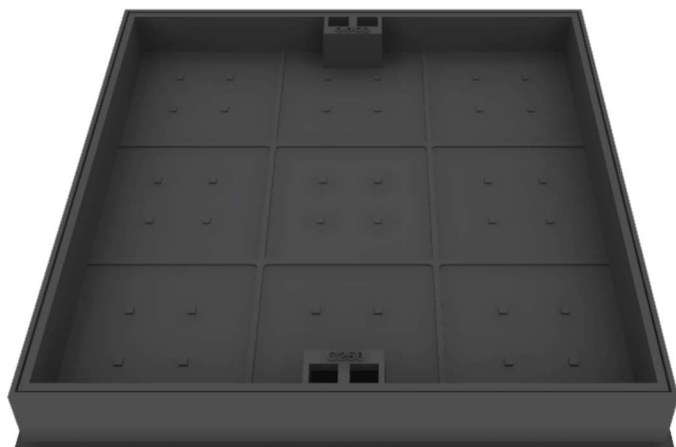

### DESCRIPTION

Recessed cast iron cover with load class C250, test force 250kN.

Cover with 50mm recess for filling with concrete or stone and equipped with two side handles for easy handling.

Hose with hydraulic section for odor sealing and useful opening according to the selected model.  
Device made of spheroidal graphite cast iron (ductile), EN-GJS-500-7, according to EN1563.

Area of application: walks, pedestrian zones, commercial areas with conditioned traffic and car parks.

Indicated for filling with Portuguese pavement type or micro-cube, in order to conceal the presence of the cap closing device in the surrounding space.

Ref	Model	A1 x A2	O1 x O2	H1	H	h	Class
921041	500	480 x 480	400 x 400	100	75	50	C250
921042	600	580 x 580	500 x 500	100	75	50	C250

### FEATURES:

- Spheroidal graphite cast iron cap (ductile) EN-GJS-500-7, En1563;
- According to EN 124-2:2015, load class C250;
- Hydraulic seal to prevent the passage of odors;
- Fitted with a central handle to lift the lid;
- Corrosion protection paint.

Optional: Custom tags

### INSTALLATION LOCATION:

Street cantilever areas along lancis that, as measured from the edge of the curb, can be extended by a maximum of 0.5 m in the road and 0.2 m in the sidewalk.

### DRAWINGS

