


# Guard

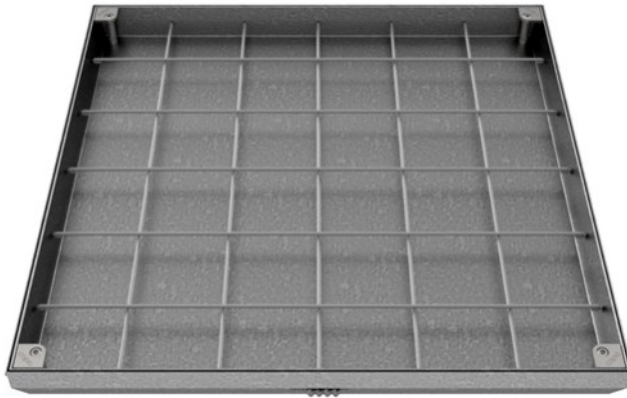

Sealed recessed cover with EPDM gasket and screw system to ensure total seal to liquids, gases and odors. Discrete cover edges to disguise the device in the surrounding environment.

## opcional


- Lifting keys ref.º 508703



## dimensions

ref.	model	O <sub>1</sub> x O <sub>2</sub>	A <sub>1</sub> x A <sub>2</sub>	H	h	Class
515.R5.30	300	200 x 200	338 x 338	70	50	C250
515.R5.40	400	300 x 300	438 x 438	70	50	C250
515.R5.50	500	400 x 400	538 x 538	70	50	B125
515.R5.60	600	500 x 500	638 x 638	70	50	B125
515.R5.70	700	600 x 600	738 x 738	70	50	A15
515.R5.80	800	700 x 700	838 x 838	70	50	A15

A<sub>1</sub> x A<sub>2</sub> - dimensions // O<sub>1</sub> x O<sub>2</sub> - clear opening // H - height // h - recess

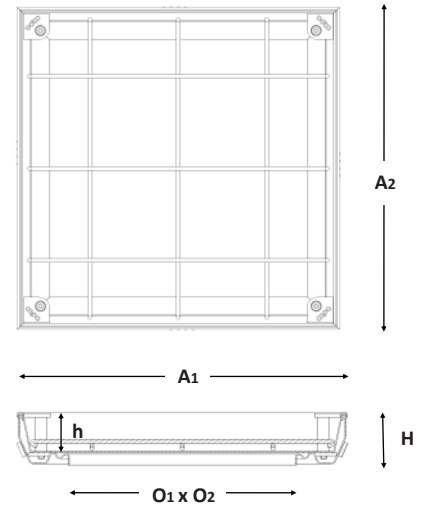

## specifications

- Recessed galvanized steel manhole cover and frame;
- EPDM seal, ensuring water and odour tightness;
- Tapered design allows the easy removal and maintenance
- Loading class from A15 to C250, according EN124-3:2015.

