


# Guard Plus

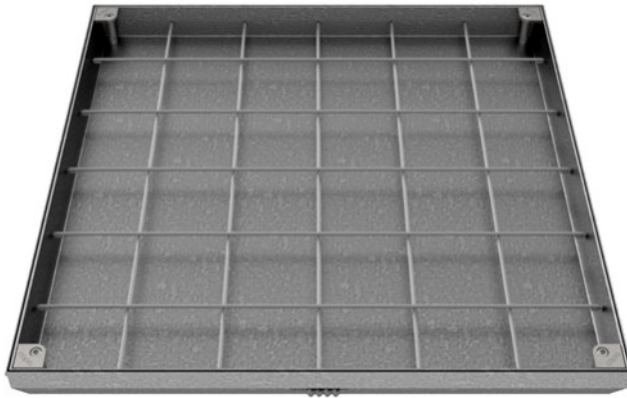

Sealed recessed cover with EPDM gasket and screw system to ensure total seal to liquids, gases and odors. Discrete cover edges to disguise the device in the surrounding environment.

## opcional


- Lifting Kit ref.ª 508703



## dimensions

ref.	model	O <sub>1</sub> x O <sub>2</sub>	A <sub>1</sub> x A <sub>2</sub>	H	h	Class
516.R5.C.50	500	400 x 400	538 x 538	110	50	C250
516.R5.C.60	600	500 x 500	638 x 638	110	50	C250
516.R5.C.70	700	600 x 600	738 x 738	110	50	C250
516.R5.D.50	500	400 x 300	538 x 538	135	50	D400
516.R5.D.60	600	500 x 400	638 x 638	135	50	D400
516.R5.D.70	700	600 x 500	738 x 738	135	50	D400

A<sub>1</sub> x A<sub>2</sub> - dimensions // O<sub>1</sub> x O<sub>2</sub> - clear opening // H - height // h - recess

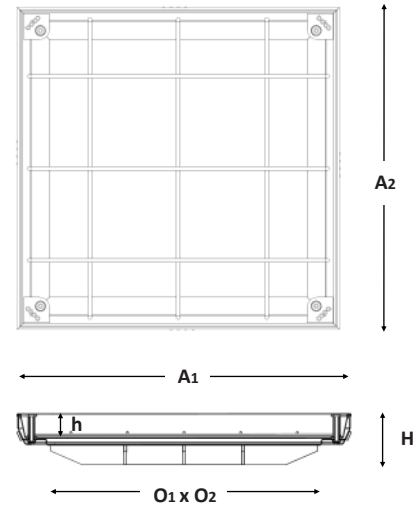

## specifications

- Recessed galvanized steel manhole cover and frame;
- EPDM seal, ensuring water and odour tightness;
- Tapered design allows the easy removal and maintenance
- Loading class C250 and D400, according EN124-3:2015.

